



T85




T85	
WIDTH OF FOUNDATION	23 mm
WIRE N°	# 27 / 31
WIRE DIAMETER	0,430 / 0,330 mm
NUMBER OF POINTS	250 / (INCH) ²
ROWS	18
TOTAL HEIGHT WITH PLYBACK	10

TF12




TF12	
WIDTH OF FOUNDATION	23 mm
WIRE N°	# 27 / 31
WIRE DIAMETER	0,430 / 0,330 mm
NUMBER OF POINTS	330 / (INCH) ²
ROWS	18
TOTAL HEIGHT WITH PLYBACK	9,5

T62



T62	
WIDTH OF FOUNDATION	23 mm
WIRE N°	# 27 / 31
WIRE DIAMETER	0,430 / 0,330 mm
NUMBER OF POINTS	290 / (INCH) ²
ROWS	18
TOTAL HEIGHT WITH PLYBACK	11 mm

RK4

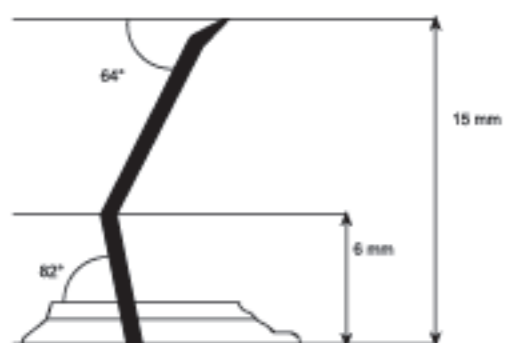

RK4	
WIDTH OF FOUNDATION	26 mm
WIRE N°	# 27 / 31
WIRE DIAMETER	0,430 / 0,330 mm
NUMBER OF POINTS	290 / (INCH) ²
ROWS	18
TOTAL HEIGHT WITH PLYBACK	15,5





28831 BAVENO (VB) Italia - via Donne della Resistenza, 34
 Tel. 0323.924.786-0323.923.692 - Fax 0323.922.392
 e-mail: info@schelling.it - www.schelling1867.it



RAISING FILLET FOR FAR EAST


RAISING FILLET FOR FAR EAST

T1

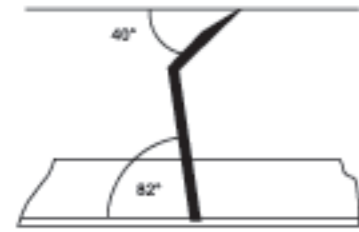


T1	
WIDTH OF FOUNDATION	23 mm
WIRE N°	# 27 / 31
WIRE DIAMETER	0,430 / 0,330 mm
NUMBER OF POINTS	310 / (INCH) ²
ROWS	18
TOTAL HEIGHT WITH FLYBACK	9,5

T91

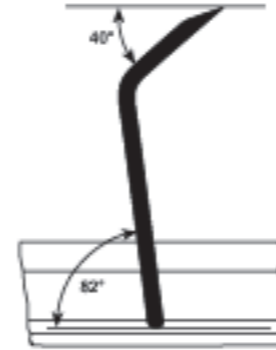


T91	
WIDTH OF FOUNDATION	23 mm
WIRE N°	# 27 / 31
WIRE DIAMETER	0,430 / 0,330 mm
NUMBER OF POINTS	310 / (INCH) ²
ROWS	18
TOTAL HEIGHT WITH FLYBACK	9,5

TCH14

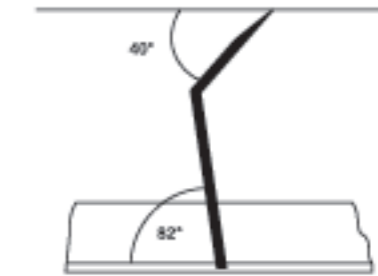


TCH14	
WIDTH OF FOUNDATION	20 mm
WIRE N°	# 14 (28)
WIRE DIAMETER	0,400 mm
NUMBER OF POINTS	250 / (INCH) ²
ROWS	18
TOTAL HEIGHT WITH FLYBACK	11,5

T2

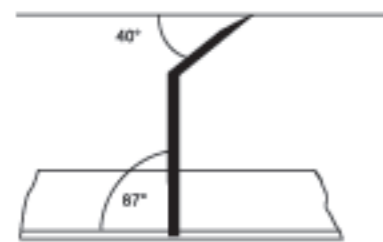


T2	
WIDTH OF FOUNDATION	23 mm
WIRE N°	# 27 / 31
WIRE DIAMETER	0,430 / 0,330 mm
NUMBER OF POINTS	310 / (INCH) ²
ROWS	18
TOTAL HEIGHT WITH FLYBACK	10

T15

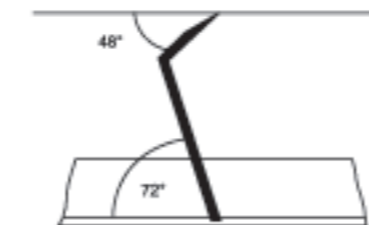


T15	
WIDTH OF FOUNDATION	23 mm
WIRE N°	# 28 / 32
WIRE DIAMETER	0,405 / 0,305 mm
NUMBER OF POINTS	360 / (INCH) ²
ROWS	18
TOTAL HEIGHT WITH FLYBACK	9,5

TCH18

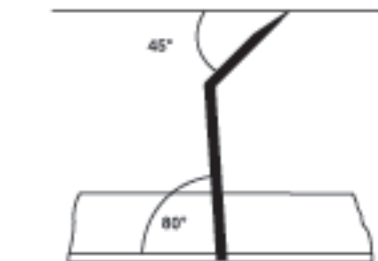

TCH18	
WIDTH OF FOUNDATION	20 mm
WIRE N°	# 18 (30)
WIRE DIAMETER	0,355 mm
NUMBER OF POINTS	300 / (INCH) ²
ROWS	18
TOTAL HEIGHT WITH FLYBACK	11

T3

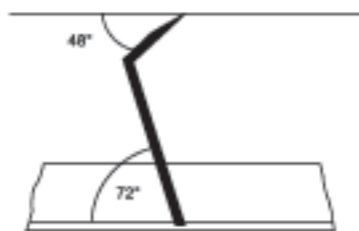


T3	
WIDTH OF FOUNDATION	23 mm
WIRE N°	# 28 / 32
WIRE DIAMETER	0,405 / 0,305 mm
NUMBER OF POINTS	330 / (INCH) ²
ROWS	18
TOTAL HEIGHT WITH FLYBACK	9,5

T5




T5	
WIDTH OF FOUNDATION	23 mm
WIRE N°	# 24 (33)
WIRE DIAMETER	0,280 mm
NUMBER OF POINTS	260 / (INCH) ²
ROWS	18
TOTAL HEIGHT WITH FLYBACK	11,5

TIGER




TIGER	
WIDTH OF FOUNDATION	26 mm
WIRE N°	# 27 / 31
WIRE DIAMETER	0,430 / 0,330 mm
NUMBER OF POINTS	310 / (INCH) ²
ROWS	DIAGONAL
TOTAL HEIGHT WITH FLYBACK	30,5

T4




T4	
WIDTH OF FOUNDATION	23 mm
WIRE N°	# 18 (30)
WIRE DIAMETER	0,355 mm
NUMBER OF POINTS	260 / (INCH) ²
ROWS	18
TOTAL HEIGHT WITH FLYBACK	11

T6

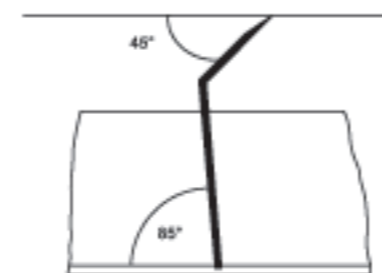

T6	
WIDTH OF FOUNDATION	23 mm
WIRE N°	# 20 (31)
WIRE DIAMETER	0,330 mm
NUMBER OF POINTS	280 / (INCH) ²
ROWS	18
TOTAL HEIGHT WITH FLYBACK	11,5

CLEANING



CLEANING	
WIDTH OF FOUNDATION	26 mm
WIRE N°	# 24 (33)
WIRE DIAMETER	0,280 mm
NUMBER OF POINTS	230 / (INCH) ²
ROWS	DIAGONAL
TOTAL HEIGHT WITH FLYBACK	30,5